

- 0-






CONTENT

Company Overview	 Company Profile Worldwide Market Product Overview 	4
Product Overview	 Smoke Alarms Carbon Monoxide Alarms Combination Smoke and Carbon Monoxide Alarms 	15-18
	 Smart Home Security System 	21-28
Knowledge Hub	 Installation Locations Detection Principle: Photoelectric vs. Ionization 	29-31



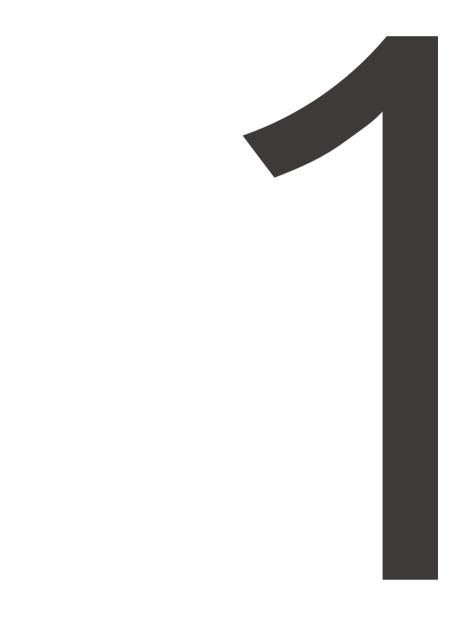

Company Overview



X-SENSE

Company Profile

X-Sense Innovations Co., Ltd.

Established in 2013, X-Sense is a renowned pioneer in home and commercial safety products, committed to delivering exceptional quality through cutting-edge technologies and premium materials.

Having successfully sold over 15 million devices across 50+ countries, X-Sense continuously expands its expertise to cater to the evolving needs of its customers. Our company takes pride in offering professional and tailored solutions to meet diverse market demands.







500⁺ EMPLOYEES WORLD-





15,000,000+

DEVICES



8 PRODUCTION





100% FULL INSPECTION














Worldwide Market

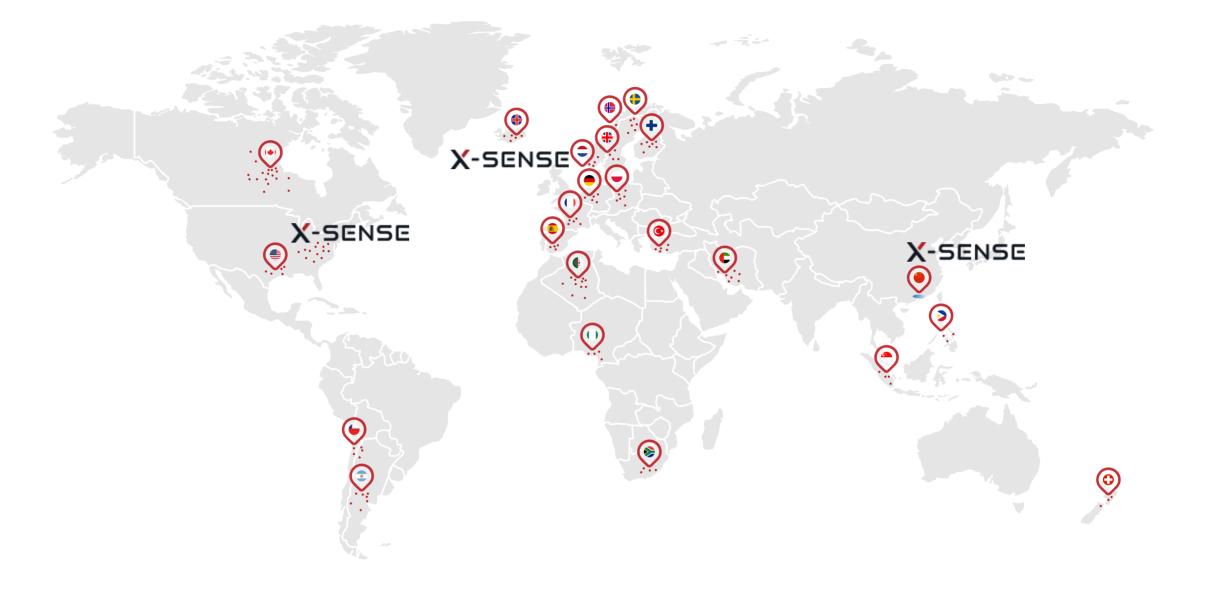












Product Overview

Smoke Alarms

Smoke& CO Detectors

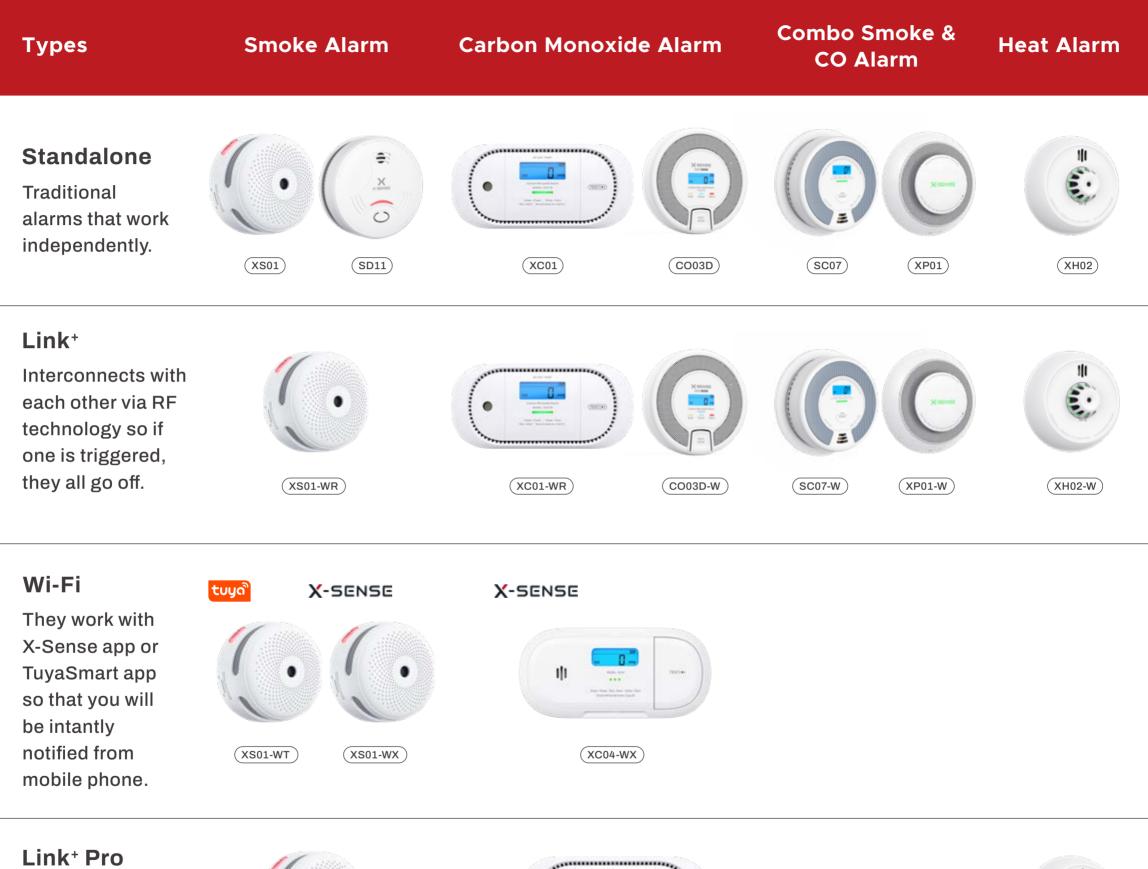

Can achieve both RF interlinked and Wi-Fi functions with base station.



(XS01-M)

(XS01-M)









X

A

 (\mathcal{M})

Photoelectric Technology

Small yet Powerful

Hassle-Free Installation

Insect-Proof Design

Self-Check Function

Easily Silence or Test the Device



85 dB Alarm

XS01 Series

Standalone Smoke Alarm XS01

Wireless Interlinked Smoke Alarm XS01-WR

Wi-Fi Smoke Alarm XS01-WX (X-Sense App) Wi-Fi Smoke Alarm XS01-WT (TuyaSmart App)

Packs outstanding functionality

into an elegant design

3.0 in (78 mm)

TEST/4×


1.9 in (48 mm)

Technical Specifications:

Model	XS01	XS01-WR	XS01-WT	XS01-WX
Power Source	10-year 3 V CR2/ 3A lithium battery	Replaceable 3 V CR123A lithium battery	Replaceable 3 V CR123A lithium battery	Replaceable 3 V CR123A lithium battery
Sensor Type	Photoelectric	Photoelectric	Photoelectric	Photoelectric
Operating Life	10 years	10 years	10 years	10 years
Alarm Sound Level	≥ 85 dB at 3 m	≥ 85 dB at 3 m	≥ 85 dB at 3 m	≥ 85 dB at 3 m
Dimension	Ø 78 × 48 mm	Ø 78 × 48 mm	Ø 78 × 48 mm	Ø 78 × 48 mm

XS01 Standalone Smoke Alarm







End-of-Life Warning

XS01-WR ⁽⁶⁾

Wireless Interlinked Smoke Alarm



Wirelessly Interlinks with 24 Link⁺ Devices








Quick Location of Source Alarm



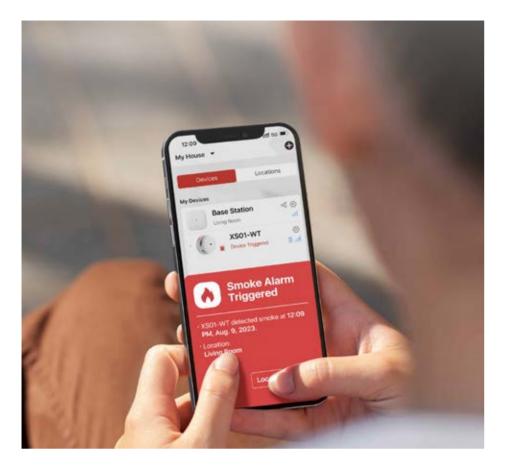



X-Sense App Wi-Fi Smoke Alarm XS01-WX



Wi-Fi Connection



Real-Time Notifications



Silence at Your Fingertips

TuyaSmart App Wi-Fi Smoke Alarm XS01-WT



2.4 GHz Wi-Fi



Standalone Smoke Alarm (SD01)

Escape Light -

Standalone Smoke Alarm (SD03)



10-Year Sealed-In Lithium Battery



4



Self-Check Function





End-of-Life Warning

Ĵ



85 dB Alarm



12



Link⁺ Series Photoelectric EN 14604 Mute Mode Ø 146 × 51 mm





C-SENSI



Wireless Interconnected Smoke Alarm[©]



Photoelectric Technology



Wirelessly Interlinks with 24 Link⁺ Devices



Full Home Coverage within 250m Range



10-Year Sealed-In Lithium Battery



85 dB Alarm

Self-Check Function



Low Battery Warning



Quick Location of Source Alarm

SD11 Series Standalone Smoke Alarm



Sensitive and Accurate



Insect-Proof Design



Wire-Free Installation in Minutes

Technical Specifications:

Model SD11/SD12/SD19

Power Source 10-year 3 V CR2/3A lithium battery

Sensor Type Photoelectric

Operating Life 10 years

Alarm Sound Level ≥ 85 dB at 3 m

Dimension 122 × 122 × 45 mm



Carbon Monoxide Alarms

0.0



10-Year Life Figaro Electrochemical CO Sensor



4

Informative, Easy-to-Read LCD

3-Color LED Indicator



Free-Standing or Wall Mounted



Self-Check Function



Test/Silence Button







XC Series

Standalone Carbon Monoxide Alarm XC01 Standalone Carbon Monoxide Alarm XC01-R Standalone Carbon Monoxide Alarm XC01-WR Wi-Fi Carbon Monoxide Alarm XC04-WX

Technical Specifications:

Model	XC01	XC01-R	XC01-WR	XC04-WX
Power Source	10-year 3 V CR2/ 3A lithium battery	Replaceable CR123A or CR2/3A lithium battery	Replaceable 3 V CR123A lithium battery	Replaceable 3 V CR123A lithium battery
Sensor Type	Electrochemical	Electrochemical	Electrochemical	Electrochemical
Operating Life	10 years	10 years	10 years	10 years
Alarm Sound Level	≥ 85 dB at 3 m	≥ 85 dB at 3 m	≥ 85 dB at 3 m	≥ 85 dB at 3 m
Dimension	135 × 63 × 24 mm	135 × 63 × 24 mm	135 × 63 × 24 mm	135 × 63 × 24 mm

XC01 Standalone Carbon Monoxide Alarm



10-Year Sealed-In Lithium Battery



End-of-Life Warning



XC01-R Standalone Carbon Monoxide Alarm



Replaceable Lithium Battery



Low Battery Warning



XC01-WR [©] Wireless Interlinked Carbon Monoxide Alarm



Wirelessly Interlinks with 24 Link⁺ Devices




Full Home Coverage within 250 m Range



Quick Location of Source Alarm



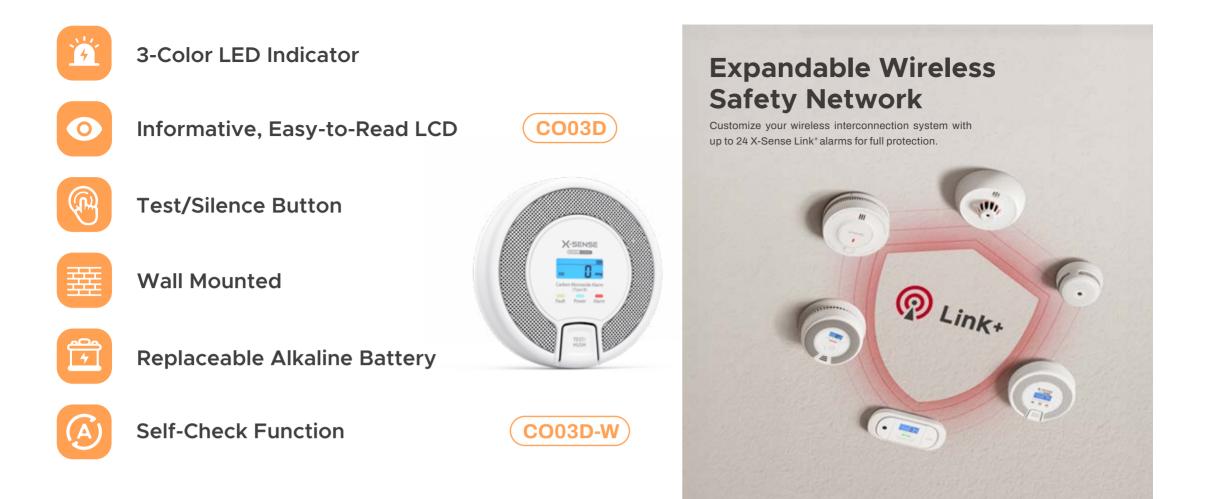

CO Series


Standalone CO Alarm CO03D

Wireless Interlinked CO Alarm CO03D-W [©]

Technical Specifications:

Model	CO03D	CO03D-W	
Power Source	Replaceable $1.5 \text{ V} \times 3 \text{ AA}$ batteries	Replaceable 1.5 V × 3 AA batteries	
Sensor Type	Electrochemical	Electrochemical	
Operating Life	10 years	10 years	
Alarm Sound Level	≥ 85 dB at 3 m	≥ 85 dB at 3 m	
Dimension	110 × 110 × 37 mm	110 × 110 × 37 mm	

Combination Smoke and Carbon Monoxide Alarms

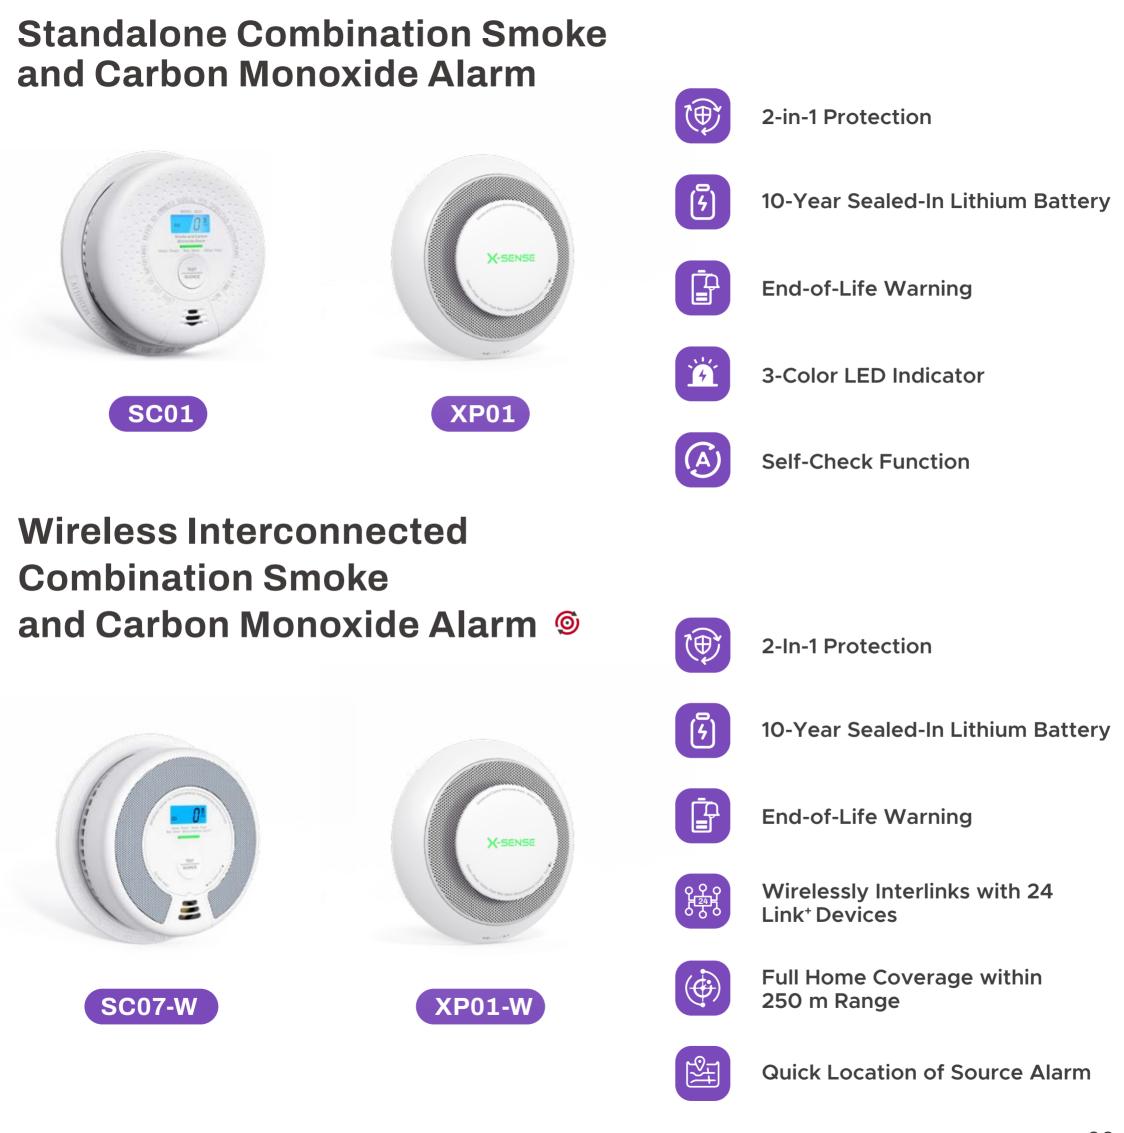


Smart Home Security System

A AMA . ALLAN MAN. -

SBS50 Base Station

Connects 50 devices to cover every corner

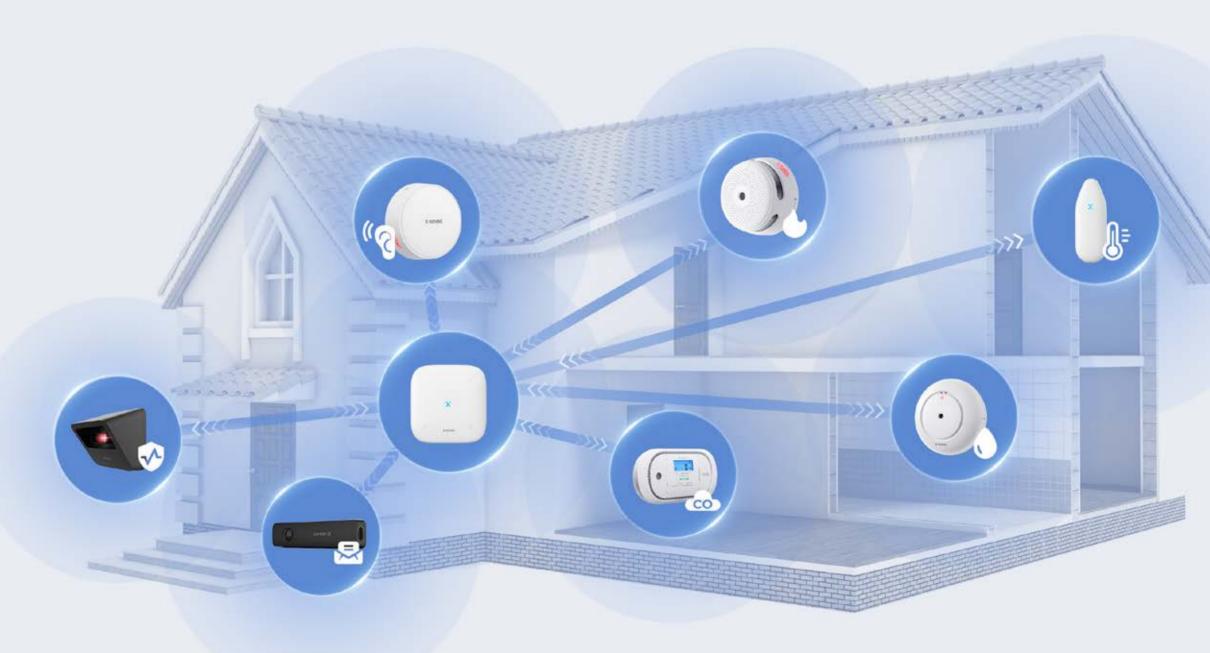



Smart Home Security System - Monitor remotely with your family


• **Comprehensive Protection:** Up to 50 devices can be connected to X-Sense SBS50 Base Station, including smoke detectors, CO detectors, water leak detectors, and more.

• User-Friendly App: Easy setup, assign specific locations and monitor the working status for each device.

• Impressive Transmission Range: Most devices offer an open-air transmission distance of 1,700 ft (500 m).

• Instant Alerts: If an alarm is triggered, our base station will loud at to 110 dB and instant notifications on the app telling you exactly where the problem is, even if you're not at home.

Cost-Free Real-Time Notifications

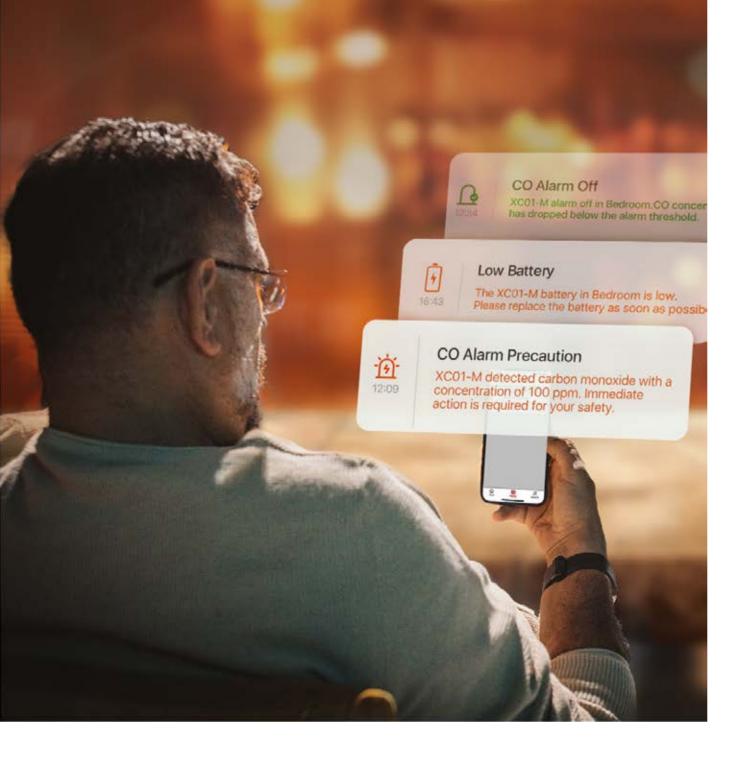



Real-Time Notifications



Test or Silence Your Devices via App



Device Sharing Feature



Self-Check Function via App



App Shows the Location



Easily to Locate the Source of Alarm



Low Battery Warning and Malfunction Warning from App



Data History

APP Functions

Link⁺ Pro Smoke Alarm



O Link+ Pro

 Link⁺ Pro is an upgraded technology by X-Sense, which offers 2 connectivity options to cater to your preferences.

• When linked to the base station, devices maintain wireless interconnection, and you'll receive real-time notifications through the X-Sense app.

 Alternatively, Link⁺ Pro units can independently connect with other Link⁺ or Link⁺ Pro series devices, even without the SBS50 base station. These devices form an interlinked network, where all will sound if one is triggered to provide maximum safety.

Water Leak Alarm



Thermo-Humidity Sensor





Industrial-Grade Swiss Sensor



Place It Anywhere



Free Data Export



For Home Comfort, Agriculture, Food Storage and More



24/7 Real-Time Monitoring



Compatible with Alexa

Smoke and CO Alarm Listener



Makes Non-Smart Alarms Intelligent



Works with X-Sense Alarms & UL Listed Detectors



Free Real-Time Alerts



Low Battery Warning



Replaceable Alkaline Battery



Wall Mounted



Wire-Free Installation in Minutes







IMPORTER

BC Company 's-Hertogenbsoch info@bccompany.nl www.bccompany.nl +31 (0)85-0043.901

X-SENSE PRO

Telephone: +31(0)85-0043903 Email: info@xsensepro.nl Web: www.xsensepro.nl